SPECTRUM
OPTICAL INSTRUMENTS

AZ60 Series

70mm Maksutov Telescope



INSTRUCTION MANUAL

For ST-AZ60-70750

Version. 3.4

Scan QR code
for technical support
and setup video

TABLE OF CONTNT 1
SOLAR WARNING 2
INTRODUCTION 3
WHAT'S IN THE BOX 4
PARTS NAME. 5
SETTING UP 6
TRIPOD AND MOUNT 6
OPTICAL TUBE ASSEMBLY. 7
ACCESSORIES. 8
ALIGNING VIEWFINDER 9
VISUAL VIEWING 10
SMARTPHONE & BLUETOOTH 11
TELESCOPE BASICS 12
TELESCOPE MAINTENANCE 12
CELESTIAL OBSERVING. 13
HOW TO CALCULATE MAGNIFICATION 13
CHANGING BATTERY 14
COLLIMATION. 15
SPECIFICATIONS 16
WARRANTY 17
RETURN POLICY. 17
CONTACT US 17

WARNING



- **INGESTION HAZARD:** This product contains small parts.
- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **INTERNAL CHEMICAL BURNS** in as little as **2 HOURS**.
- Ensure **PROPER SUPERVISION** and keep small parts **OUT OF REACH OF CHILDREN**.
- **SEEK IMMEDIATE MEDICAL ATTENTION** if a small part or a coin battery is suspected to be swallowed or inserted inside any part of the body.



SOLAR WARNING

- Solar observations require **SPECIAL PRECAUTIONS** to ensure the safety of both your eyes and your equipment.
- The Sun emits intense and **POTENTIAL HARMFUL RADIATION**, including ultraviolet and infrared light.
- Observing the Sun without proper solar rated gear can lead to **IRREVERSIBLE DAMAGE** to your eyes and equipment.



The AZ60 Series telescope is an exceptional telescope kit designed for amateur astronomers and hobbyists who want to explore the night sky with ease. With its advanced optics and sturdy construction, this telescope is ideal for observing the moon, planets, star clusters, bright deep sky objects like the Orion Nebula and Andromeda Galaxy at night.

This telescope carries a **three year limited warranty**. For details see our website at spectrumoi.com

Some of the outstanding features of the AZ60 telescope includes:

- Fully coated glass optical elements for crisp clear images.
- Erect image diagonal for correctly orientation while viewing.
- Newly designed Aluminum casted Alt-AZ mount.
- Slow motion control cables for both axes for precision tracking.
- Preassembled aluminum full size tripod ensures a stable platform.
- Quick and easy no-tool set up.

Please take time to read through this manual before exploring the night sky. This manual helps you get familiar with your telescope, so we recommend to keep this manual around until you have fully mastered the telescope's operation. This manual gives detailed information regarding each step as well as needed reference material and helpful hints to make your observing experience simple and pleasurable.

Your telescope is designed to give you years of fun and rewarding observations. However, there are a few things to consider before using your telescope that will ensure your safety and protect your equipment.

Parts List

This section covers the parts included for your AZ60 Telescopes.

Each AZ60 telescope comes in one box. The pieces in the box including the following:



1. Optical Tube Assembly (OTA)
2. Tripod with Mount
3. 1.25" erect-image diagonal
4. 1.25" 10mm eyepiece
5. 1.25" 4mm eyepiece
6. 1.25" 20mm eyepiece
7. 1.25" 2X Barlow Lens
8. Accessory tray
9. 2 Slow motion cables
10. Smartphone adapter
11. Bluetooth remote shutter
12. Red-dot Viewfinder
13. Instruction manual

Major Parts List

This section covers the name of the major parts of your AZ60 Telescopes.



Optical Tube Assembly (OTA)
Red Dot Viewfinder
Eyepiece
Eyepiece locking thumbscrew
Diagonal
Altitude Control Cable
Diagonal locking thumbscrew
Mount
Azimuth Lock Knob
Control Cable Locking screw
Azimuth Control Cable
Tripod



OTA Lock Knob
Vixen Dovetail
Altitude Lock Knob
Control Cable Locking screw
Focuser

FIG.3

Tripod and Mount



FIG.4.1



FIG.4.2



FIG.5

1. It's recommended to set up the telescope indoor first to get familiar with the set up process.

2. Spread the tripod out fully and place the tripod on a relatively flat ground or table.

3. Take the mount out from the package. And place the mount onto the top of the tripod and all the way into the indentation. (See Fig. 4.1) There should not be a gap between the mount and the tripod are mounted correctly.

4. Lock the mount securely by tightening the large lock knob between the tripod legs. See Fig, 4.2

5. Release the tripod leg lock (see Fig.5) and fully extend the legs. You can adjust the tripod height by raising the tripod legs. At the lowest level the height of the dovetail receiver is about 29" (74cm) and about 46" (1170cm) at its highest level. When fully extended, the tripod looks similar to the image in Figure 6.

6. Attach the accessory tray onto the center spreader bar. Secure it by rotating the accessory tray until all three of the flaps are clamped down by the spreader bars. Temporarily place the un-used accessory here.

7. Install the slow motion cables for both axes. Align the locking screw with the flat area (see Fig.7) on the shaft to ensure maximum security. Rotate the slow motion cables after installing and make sure the mount moves accordingly.



FIG.6




FIG.7

Optical Tube Assembly



FIG.8

1. Remove the protective paper covering the optical tube assembly.

2. Loosen the OTA lock knob on the top of the mount by turning it counterclockwise. (see Fig.8)

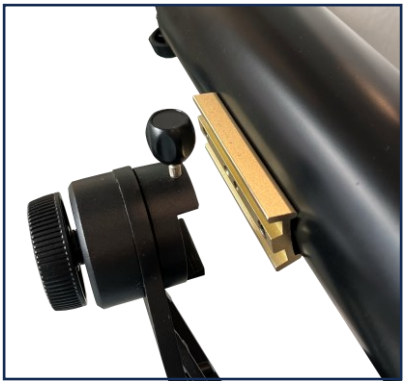


FIG.9

3. Locate the Vixen Dovetail on the OTA, usually in our signature gold color and locate the dovetail receiver on the mount (see Fig.8).

4. Slide the OTA into the dovetail receiver and tighten the OTA lock knob to a firm feel. It's recommended to place the OTA at a location where the OTA lock knob is located in the middle of the Vixen Dovetail for maximum security (see Fig.9). It's not recommended to place the OTA too far forward or back risking dropping the OTA.

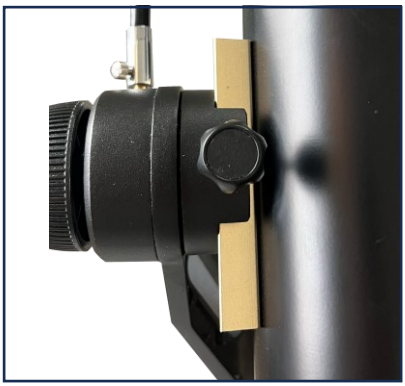


FIG.10: Top view of secured OTA

5. You may need to slide the OTA back and forth to balance the OTA on the Altitude axis as more accessories are added onto the OTA later on.

Accessories

1. For the 70mm OTA, slide the red dot viewfinder into the mount bracket and tighten the viewfinder locking screw to secure it. See Fig. 11.

2. Remove the plastic plug at the back of the OTA and make sure the two thumbscrews do not protrude into the opening of the back of the OTA before installation. Install the diagonal into the back of the OTA and retighten the two thumbscrews to secure it.



FIG.11

3. Loosen the thumbscrew on the opening end of the diagonal until it is not protruding into the opening. Insert one of the three included eyepieces into the diagonal and secure it by retightening the thumbscrew to a firm feel. See Fig.12.

4. Use different eyepieces for different magnifications. It's recommended to start off with the eyepiece with the least power (ie. the largest focal length eyepiece)

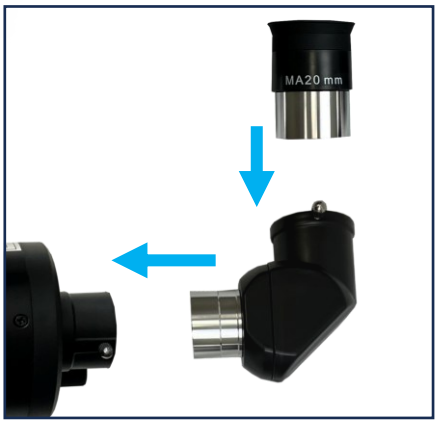


FIG.12

5. In case of requiring even higher magnifications, install the included 2X Barlow Lens between the eyepiece and diagonal to double the magnification. See Fig.13

6. It's recommended to rebalance the OTA after installing all the accessories.

7. The included Moon filter can be installed onto the metal side of the eyepiece to reduce the brightness of the Moon.



FIG.13

Aligning Viewfinder

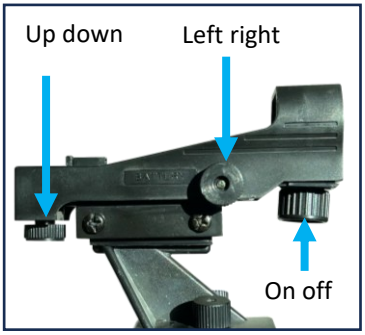


FIG.14

1. After installing the viewfinder onto the OTA, the viewfinder and OTA are not yet aligned. You may not see the same object through the eyepiece and the viewfinder. Aligning the OTA with the viewfinder is a necessary step before using the telescope.

2. Point your telescope at a stationary object at distance. A STOP sign, a light pole are some objects that often used for alignment purposes. Use the eyepiece with the lowest power and look through the eyepiece. Center the object in the eyepiece and focus image.

3. Turn on the red dot viewfinder by turning the knob in the front of the viewfinder (shown in Fig.14).

4. By turning the knob on the right side of the viewfinder, the red dot can be moved left and right. By turning the knob of the back of the viewfinder, the red dot can be moved up and down. (see Fig.14)

5. Move the red dot so that the red dot overlaps the object you have centered in the eyepiece. (see Fig. 15 and Fig.16)

6. You may need to repeat the same object at night to furthermore align the OTA and viewfinder by pointing the telescope at a bright star or the Moon.

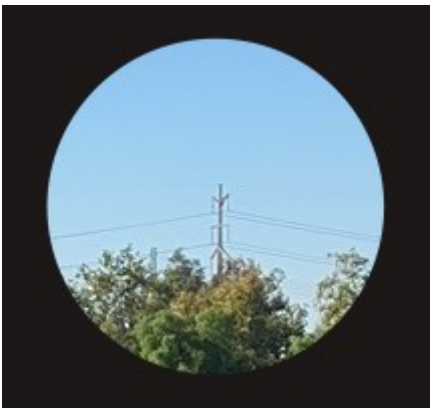


FIG.15 view through eyepiece



FIG.16 View Through Viewfinder

Visual Viewing

1. Now the telescope is eye-viewing ready. This telescope is exceptional for viewing celestial object or terrestrial object.

2. To locate an object, first loosen the two axis lock knobs shown in Fig.17 .



FIG.17

3. Move the telescope until the OTA is roughly pointing at the object you wish to observe. Then retighten the axis lock knobs. （see Fig.17)

4. Rotate the slow motion cables as you look through the viewfinder until the red dot overlaps the object you wish the observe. Look through the eyepiece and the object should be within the view of field. See Fig. 18.

5. Focus the telescope and enjoy the magnificent world around you!



FIG.18

Smartphone & Bluetooth



FIG.19




FIG.20

1. Pull open the phone clamp and clamp the phone securely. (See Fig. 19)

2. Loosen the big knob and rotate the phone clamp around until the camera is aligned with the hole on the phone clamp. (See Fig. 20)

3. Remove the eye relief from the eyepiece to reveal the teeth. (See Fig. 21) Please note that the Smartphone adapter included only works with the 10mm and 20mm eyepiece that come with the telescope.

4. Align the adapter and the eyepiece, then rotate the eyepiece to lock the two together. (See Fig. 22)

5. Insert the eyepiece and adapter back into the diagonal. Loosen the knob on the back of the phone adapter to move the phone around.

6. Turn on the camera APP and rotate the phone until a perfect circular view appears on the screen. Then re-tighten the knob to lock the phone's position.

7. Focus the telescope and take a picture through the telescope.

8. Open the Bluetooth setting APP on your phone and connect to the device named "GB Shutter." (See Fig. 23)

9. If the device name did not appear on your phone, long press the button on the remote shutter until the device name appears.

10. Now, the remote shutter is connected with the phone, press the button on the remote to take a picture.



FIG.21



FIG.22




FIG.23

Telescope Maintenance

The main lens of the telescope is the most important part of the telescope, and all Spectrum Optical Instruments telescopes have high transmission glass optics for best performance. Each glass optic is fully coated, It is very important to protect the coating and prevent any potential damages which can cause significant decrease of performance. Here are a few maintenance tips you can perform to ensure your telescope perform at its best for a long time.

- When the telescope is not in use, we recommend putting the dust cover back onto the OTA to prevent any dust and/or moister build-up on the main optics. It is also recommended to cover the back of the OTA with the included plastic plug to prevent foreign objects entering the OTA body.
- In case of dust/moisture build-up on the outside of the main optics, you can remove it with a camel hair brush or pressurized air.
    - When using a camel hair brush, make sure there is no foreign object on the brush before using. Lightly move brush across the optic to remove the dust/moisture;
    - When using a can a pressurized air, spray the air onto the optics at an angel so that the dust can be blown away from the optic.
- In case of moisture build-up occur on the inside of the OTA, remove the plastic cover of the back of the OTA, and point the telescope downward to allow to moisture to evaporate.
- In case of finger print/grease on the optics, it is necessary to remove it with the correct cloth motion.
    - Use any commercial optic cleaning solution with a optics cleaning cloth/or white tissue with the least amount of debris;
    - Apply the cleaning solution onto the cloth/tissue. **DO NOT** apply the cleaning solution directly onto the optics;
    - Apply the cloth/tissue to the optics with low pressure;
    - Move the cloth/tissue from the center of the optics to the outer portion. **DO NOT RUB the optics!**
    - Repeat until optics is fully cleaned.

Celestial Observing

PLEASE DO NOT LOOK AT THE SUN WITHOUT PROPER SOLAR FILTER.

Moon Observing



FIG.24

When looking through the telescope at the Moon, you may find that the Moon is exceptionally bright when it is at full moon. This is because the Moon is reflecting the light from the Sun. Even though the Moon can be very bright, the light it reflects is not harmful to your eyes. You may install the Moon filter to reduce the brightness.

When observing the Moon's surface details, it is better to install the optional Moon filter. The Moon filter is a yellow/green filter to help bring the contrast of the craters. If you are viewing through your phone with the phone adapter, we recommend lowering the exposure which will bring you a similar effect of having a moon filter.

Planets Observing

Planets observing is also fascinating. However, please note that Planets observing is limited by the seeing condition of your observation site including light pollution and atmospheric condition. So observing planets in the city and/or while the planets are low in the horizon may not be the best options.

You may see the ring of Saturn; the lunar phase of Venus; the Great Red spot of Jupiter; surface detail of Mars, etc.




FIG.25

How to calculate Magnification

Calculating the magnification of a telescope is a very straightforward and easy process that involves dividing the telescope's focal length by the eyepieces' focal length.

The Focal length is the distance from the primary lens or the mirror to the point where the incoming light converges. To determine magnification, simply divide the telescope's focal length by the eyepieces' focal length. Here is the equation for the calculation.

For instance, if your telescope has a focal length of 400mm and you're using an eyepiece with a focal length of 10mm, the magnification of this set up can be calculated as shown:

$$Magnification = \frac{Telescope\ Focal\ Length}{Eyepiece\ Focal\ Length} = \frac{400mm}{10mm} = 40X$$

Please keep in mind that while magnification influences the apparent size of observed objects, it is also important to consider factors like atmospheric conditions and telescope's optics for a comprehensive view.

Changing Battery

Bluetooth Shutter

In case of replacing the battery for the Bluetooth shutter, remove the screw on the back of the shutter to allow access to the battery compartment, and replace the old battery with a new CR2032 battery.

- Please ensure that the battery or the screw is **OUT OF REACH OF CHILDREN**.



FIG.26



FIG.27

Red Dot Viewfinder

The included red dot viewfinder utilizes 1x CR2032 button battery and the battery can be swapped out with just a few steps.

- Locate the screw located on the top of the viewfinder, and remove it. See Fig. 28
- Locate the battery compartment located in the center of the viewfinder.
- The left side of the battery compartment states “PUSH,” and the right side states “BATTERY.”
- Push the battery compartment out from the left side where it states “PUSH.” (See Fig. 29)
- Once the battery compartment is out of the viewfinder, you can remove the old battery. (See Fig. 30)
- Insert the new battery and insert the battery compartment back into the viewfinder.




FIG.28



FIG.29



FIG.30

Collimation

This section identifies the necessary steps to collimate your SpectrumOI Maksutov-Cassegrain Optical Tube Assembly. Please note that you would need a bright light source to complete the process such as an artificial star.

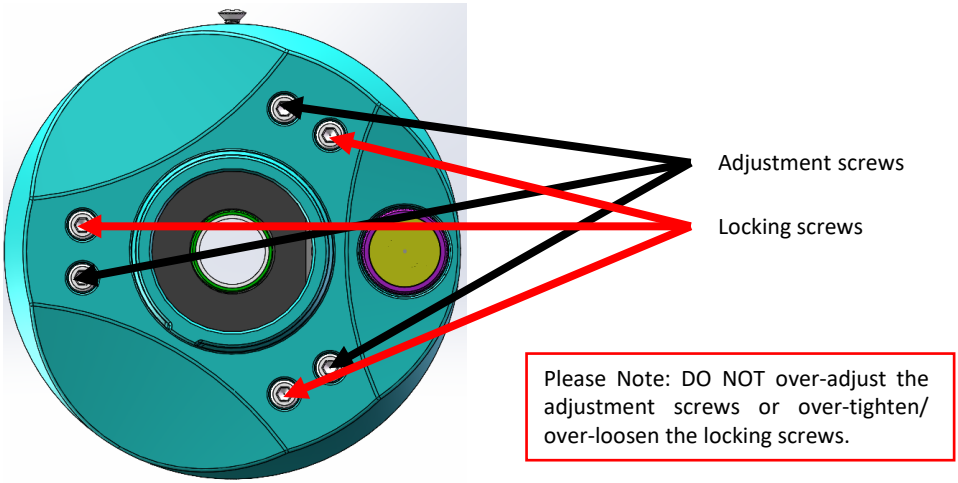


FIG.31. Back view of OTA

1. Inspect if the OTA is out of collimation. Please point your OTA at a bright object such as an artificial star or a bright star at night. Please see Fig. 32 and Fig 33 for reference.




FIG.32. Well Collimated



FIG.33. Needs Collimation

2. In case of the OTA being out of collimation, slightly loosen the locking screws and adjust the adjustment screws slowly while looking through the telescope.

3. You may need to adjust the adjustment screw back and forth to get the OTA collimated.

4. Retighten the locking screws after the OTA is well collimated.

SPECIFICATIONS



Model	ST-AZ60-70700	ST-AZ60-70750	ST-AZ60-80900	ST-AZ60-90660	ST-AZ60-114500
Optical Design	Refractor	Maksutov-Cassegrain	Refractor	Refractor	Reflector
Optical Element	Fully Coated		Fully Coated	Fully Coated	Fully Coated
Mount type	Single-arm Aluminum Alt-Az mount w/ Slow Motion Control Cables				
Tripod	Full size Aluminum adjustable 2" tripod				
Aperture	70 mm (2.8")	70 mm (2.8")	80 mm (3.15")	90 mm (3.5")	114 mm (4.5")
Focal Length	700 mm	750 mm	900 mm	660 mm	500 mm
Focal Ratio	f/10	f/10.71	f/11.25	f/7.33	f/4.4
Eyepiece 1	4mm – 1.25"	4mm – 1.25"	4mm – 1.25"	4mm – 1.25"	4mm – 1.25"
Eyepiece 2	10mm – 1.25"	10mm – 1.25"	10mm – 1.25"	10mm – 1.25"	10mm – 1.25"
Eyepiece 3	20mm – 1.25"	20mm – 1.25"	20mm – 1.25"	20mm – 1.25"	20mm – 1.25"
Barlow Lens	2X Barlow	2X Barlow	2X Barlow	2X Barlow	2X Barlow
Diagonal	Erect Image - 90° 1.25"	Erect Image - 90° 1.25"	Erect Image - 90° 1.25"	Erect Image - 90° 1.25"	Erect Image - 90° 1.25"
Magnification	35X – 350X	37X -375X	45X – 450X	33X – 330X	25X – 250X
View Finder	Red Dot Viewfinder (Battery included)	Red Dot Viewfinder (Battery included)	Red Dot Viewfinder (Battery included)	Red Dot Viewfinder (Battery included)	Red Dot Viewfinder (Battery included)

Note: Specifications are subject to change without notice or obligation

THREE YEAR WARRANTY

Thank you for choosing Spectrum Optical Instruments as your trusted source for telescopes, microscopes and other optical products. We stand behind the quality of our products and offer a **THREE-YEAR limited warranty** from the date of purchase within the US. If a defect is identified on a new product, Spectrum Optical Instruments will repair or replace a product with proof of original purchase. Please note that this warranty only applies to the original purchaser and it is not transferable. Any product that is purchased from anyone or organization other than Spectrum Optical Instruments or authorized dealer is not covered in this warranty.

Additionally, this warranty does NOT cover damage caused by misuse, mishandling, unauthorized repairs, or normal wear and tear. Spectrum Optical Instruments specifically disclaims special, indirect, or consequential damages or lost profit which may result from a breach of this warranty. Any implied warranties which cannot be disclaimed are hereby limited to a term of three years from the date of original retail purchase.

Spectrum Optical Instruments shall use reasonable efforts to repair or replace any product covered by this warranty within thirty days of receipt. In an event where repairing or replacement would require more than thirty days, Spectrum Optical Instruments shall notify the customer in advanced. Spectrum Optical Instruments reserves the right to replace any obsolete product with a new product of comparable price and performance.

Spectrum Optical Instruments reserves the right to change product specifications or to discontinue products without notice. This warranty gives specific rights. You may have other rights which vary from state to state. For warranty inquires, please contact: customer@spectrumoi.com

RETURN POLICY

As a condition to the obligation to repair or replace your product, the product needs to be returned to Spectrum Optical Instruments with proof of original purchase from Spectrum Optical Instruments or an authorized dealer.

A claim is required to be filed before return of a product. A claim template can be obtained from Spectrum Optical Instruments by email. Please contact customer service at customer@spectrumoi.com in such an event. Each return product must include a written statement detailing the nature of the claimed defect. As well as the original purchaser's name, address, and contact information.

Buyers are responsible for return shipping and handling cost for warranty services after 30 days of original purchase. Our warranty covers parts and labor only.

Spectrum Optical Instruments reserves the rights to replace an obsolete product with a new product of comparable price and performance. In event of a defected product shall be replaced by a new product, the defected product become the property of Spectrum Optical Instruments. Spectrum Optical Instruments does not issue refunds but only repair or replacement.

CUSTOMER SERVICE

Our Focus: Customer Satisfaction

Our dedication to your satisfaction is at the core of everything we do. We understand the importance of having the optical instrument to enhance your pursuits, whether you're exploring the cosmos or diving into the microscopic world.

US-based team, Lightening-fast Response

When you reach out to us, you're not just getting assistance; you're connecting with a team of professional experts right here in California. We're proud to based in the USA, and we stand by our commitment to provide you with answer and support within 24 hours. Your questions and concerns are our top priority.

Email us: customer@spectrumoi.com
Visit out website: www.spectrumoi.com